



Pb Free

RoHS Compliant

## Features

- Miniature ceramic package
- Highly reliable with seam welding
- CMOS output
- Supply voltage  $V_{DD}=3.3V$
- $\pm 25 \times 10^{-6}$ ,  $\pm 20 \times 10^{-6}$  available

Table 1

Stability Code	Stability $\times 10^{-6}$	Operating Temperature Range (°C)	Note
0	$\pm 50$	-10 to +70	Standard specifications
S	$\pm 30$		
U	$\pm 25$		
W	$\pm 20$		
F	$\pm 100$	-40 to +85	With only certain frequencies
G	$\pm 50$		

## How to Order

KC7050A 25.0000 C 3 0 E 00  
① ② ③ ④ ⑤ ⑥ ⑦

- ① Type (7.0×5.0mm SMD)
- ② Output Frequency
- ③ Output Type (CMOS)
- ④ Supply Voltage (3.3V)
- ⑤ Frequency Tolerance (See Table 1)
- ⑥ Symmetry/Enable Function (45/55%, Stand-by)
- ⑦ Customer Special Model Suffix (STD Specification is "00")

Packaging (Tape & Reel 1000pcs./reel)


## Specifications

Item	Symbol	Conditions	Min.	Max.	Units	
Output Frequency Range	Fo		1.8	160	MHz	
Frequency Tolerance	F <sub>tol</sub>	Initial tolerance, Operating temperature range, Rated power supply voltage change, Load change, Aging (1year @25°C), Shock and vibration	Op. Temp.: -40 to +85°C	-100	+100	$\times 10^{-6}$
			Op. Temp.: -10 to +70°C/ -40 to +85°C	-50	+50	
			Op. Temp.: -10 to +70°C/ -40 to +85°C	-30	+30	
			Op. Temp.: -10 to +70°C	-25	+25	
			Op. Temp.: -10 to +70°C	-20	+20	
Storage Temperature Range	T <sub>stg</sub>		-55	+125	°C	
Operating Temperature Range	T <sub>use</sub>	Standard Specifications	-10	+70	°C	
		Extend (Option)	-40	+85		
Max. Supply Voltage	—		-0.5	+7	V	
Supply Voltage	V <sub>DD</sub>	Freq. Tol.Code: 0, S, F	2.97	3.63	V	
		Freq. Tol.Code: U, G	3.14	3.46		
		Freq. Tol.Code: W	3.20	3.40		
Current Consumption (Maximum Loaded)	I <sub>DD</sub>	1.8≤Fo≤20MHz	—	10	mA	
		20<Fo≤40MHz	—	15		
		40<Fo≤60MHz	—	30		
		60<Fo≤100MHz	—	35		
		100<Fo≤135MHz	—	45		
		135<Fo≤160MHz	—	60		
Stand-by Current	I <sub>std</sub>		—	10	μA	
Symmetry	SYM	@50% V <sub>DD</sub>	45	55	%	
Rise/Fall Time (10% V <sub>DD</sub> to 90% V <sub>DD</sub> Maximum Loaded)	Tr/Tf	1.8≤Fo≤26MHz	—	10	nS	
		26<Fo≤45MHz	—	8		
		45<Fo≤100MHz	—	5		
		100<Fo≤160MHz	—	2.5		
Output Voltage-"L"	V <sub>OL</sub>	I <sub>OL</sub> =8mA	—	10% V <sub>DD</sub>	V	
Output Voltage-"H"	V <sub>OH</sub>	I <sub>OH</sub> =-8mA	90% V <sub>DD</sub>	—	V	
Output Load	L <sub>CMOS</sub>	CMOS Output	—	15	pF	
Input Voltage Range	V <sub>IN</sub>		0	V <sub>DD</sub>	V	
Input Voltage-"L"	V <sub>IL</sub>		—	30% V <sub>DD</sub>	V	
Input Voltage-"H"	V <sub>IH</sub>		70% V <sub>DD</sub>	—	V	
Disable Time	—		—	150	nS	
Enable Time	—		—	5	mS	
Start-up Time	ST	@ Minimum Operation Voltage to be 0 sec.	—	10	mS	

Note: All electrical characteristics are defined at the maximum load and operating temperature range.  
Please contact us for inquiries about operating temperature range, available frequencies and other conditions.

## Dimensions

(Unit : mm)

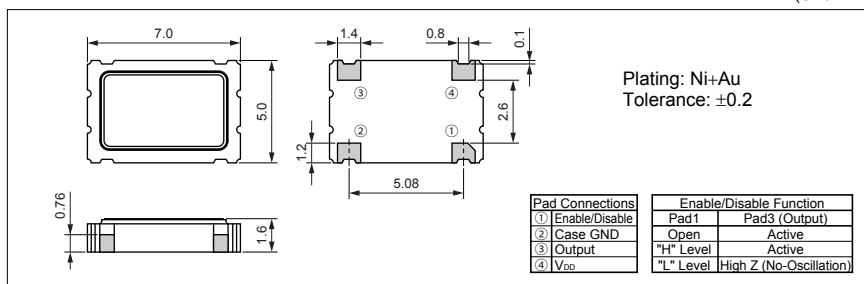

## Recommended Land Pattern

(Unit : mm)

